


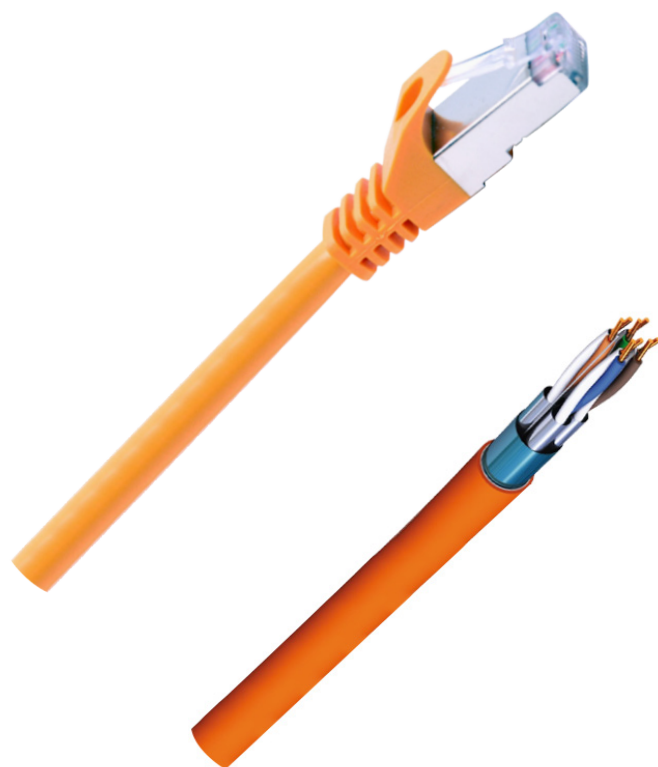

Product Description

BCP category 6A foiled/foiled F/FTP patch cords are designed and manufactured to meet and exceed the ISO, CENELEC and TIA standards, including ANSI/TIA-568-C.2 Standard of 2009 and ANSI/TIA-568.0-D Standard of 2017.

This delivers Class FA link and channel performance supporting all applications detailed and proposed within the standards. This superior performance cable is ETL component verified.

Features & Benefits

- 500 MHz with over 10Gbps
- 25 Years Warranty
- ANSI/TIA-568-C.2 Standard of 2009
- ANSI/TIA-568.0-D Standard of 2017
- Foiled/Foiled
- LSZH or PVC jacket
- Available in different colours
- Available in different lengths
- Durable for 750 insertion cycles

Applications

- Data centres
- Telecommunication networks
- LAN applications
- CATV - Cable television
- CCTV

Technical Specifications

Conductor	26AWG, Stranded copper
Insulation	Foamed Polyethylene
Outer Sheath	Flame resistant, LSZH & PVC
Outer Diameter	6.90 mm x 13.8 mm (+/- 0.3mm)
Installation Temperature Range	0°C to 60°C
Operating Temperature Range	-20°C to +60°C
Minimum Bend Radius	60mm (during installation) 31mm (during operation)
Flame Retardance	IEC 60332-1
Smoke Emission	IEC 61034



Ordering Information

Use combinations of **bold** letters and numbers to create part numbers for ordering.

Construction		Colour		Material		Standard	
B/UUTP	U/UTP	BLK	Black	HD	HDPE	-E	Extra Range
B/FUTP	F/UTP	GRY	Grey	PV	PVC	-P	Platinum
B/SFUTP	SF/UTP	WHT	White	LS	LSZH		
B/SFTP	S/FTP	ORN	Orange	LD	LDPE		
B/FFTP	F/FTP	GRN	Green	DJ	Double Jacket PE/PVC		
B/UFTP	U/FTP	BLU	Blue	PE	Polyethylene		
B/FFTP	C6A	ORN	3	LS		-P	
Cat 5E	C5E	3m	3	Flat	F	Outdoor	OD
Cat 6	C6	5m	5	Angled Boot	A		
Cat 6A	C6A	10m	10	Locked	L		
Cat 7	C7			Light	D		
Cat 8	C8			Micro size	M		
				Rodent Proof	R		
				Self-Tracing	S		
				Tangle-Free	T		
				Ultra-Flat	U		
Category		Length		Additional*		Outdoor**	

*Leave blank if no extra detail. **Leave blank if indoor.

Example Part Number	
Description	Part Number
BCP F/FTP Cat 6A Copper Patch Cord Orange 3m LSZH - Platinum	B/FFTPC6AORN3LS-P