


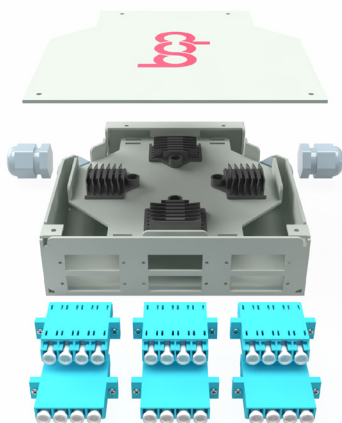

Product Description


BCP® fibre optic distribution and termination boxes are used for the easy-access and distribution of fibre optic connections between networks.

Features & Benefits

- Suitable for pigtail, ribbon and cable distribution
- 12 FO to 24 FO
- Sturdy IP40 design
- 4 cable entries
- 19" DIN rail
- Wall-mounted applications
- No special tools required
- Protects fibres in the field

Applications

- Telecommunication networks
- CATV – Cable television
- Fibre-to-the-Home (FTTH)



Technical Specifications

Dimensions (mm)	125x344x130
Weight (kg)	Varied (loaded/unloaded)
Cable entry ports	4 entries
Material	Steel
Operation Temperature	-40°C to +70°C
Installation Temperature	-40°C to +70°C





Ordering Information

Use combinations of **bold** letters and numbers to create part numbers for ordering.

Product (Box)		Material		Polish Type*		No of Fibres	
B/ITB	Indoor Terminal	P	Plastic	A	APC	08	8 Pieces
B/IDB	Indoor Distribution	M	Metal	U	UPC	12	12 Pieces
B/OTB	Outdoor Terminal					16	16 Pieces
B/ODB	Outdoor Distribution					24	24 Pieces
B/ISB	Indoor Splitter Box						
B/OSB	Outdoor Splitter Box						
B/DRB	DIN Rail Box						
▲	▲	▲	▲	▲	▲	▲	▲
B/DRB	04	M	LC	U	DX	24	
	▼		▼		▼		▼
Model 1	01	SC	SC	Duplex	DX	Pigtails	/P
Model 2	02	LC	LC	Quad	QD		
Model 3	03			Simplex	SX		
Model 4	04						
Model 5	05						
Model 6	06						
Model 7	07						
Model 8	08						
Model 9	09						
Model		Adapter Type		Capacity		Additional*	

*Leave column blank if unloaded.

Example Part Number	
Description	Part Number
Indoor LC Duplex 24 FO DIN Rail Subscriber Terminal Box – Metal – Model 04	B/DRB04MLCUDX24