



Product Description


BCP® fibre optic distribution and termination boxes are used for the easy-access and distribution of fibre optic connections between networks.

Features & Benefits

- Suitable for mini-network terminal distribution
- 96 FO
- Max 4 splice trays (24 FO each)
- RoHS compliant materials
- Lockable cover
- For use indoors

Applications

- Telecommunication networks
- LAN, MAN and WAN applications
- CATV - Cable television
- Fibre-to-the-Home (FTTH)




Technical Specifications

Material	Cold-Rolled Steel
Dimensions	172 x 439 x 166 mm
Max Quantity of Splice Tray	4pcs
Max Splice Tray Capacity	24 fibres
Max Capacity	96 fibres



Suitable for Splicing & Stacking

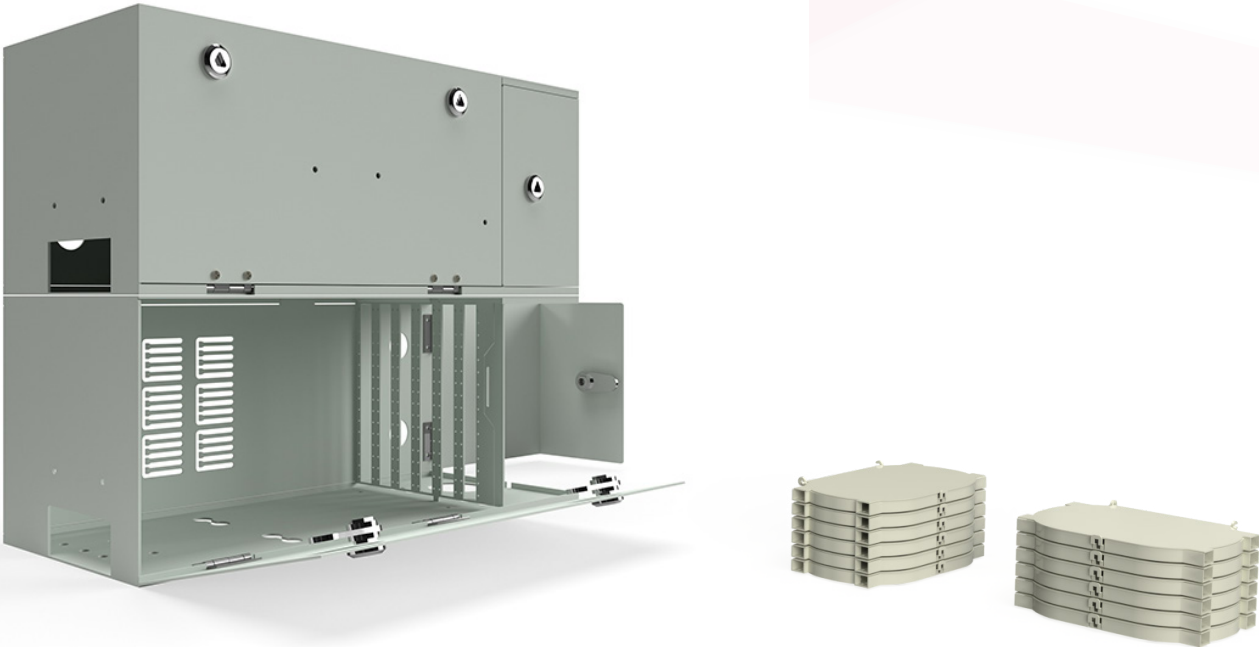

Ordering Information

Use combinations of **bold** letters and numbers to create part numbers for ordering.

Product (Box)		Material		Polish Type*		No of Fibres	
ISB	Indoor Splicing Box	M	Metal	A	APC UPC	72	72 Pieces
						96	96 Pieces
						144	144 Pieces
▲		▲		▲			
IDB	04	M	SC	U	SX	96	/P
▼		▼		▼		▼	
Model 02	02	SC	SC	Duplex	DX	Pigtails	/P
Model 04	04	LC	LC	Simplex	SX		
Model 05	05						
Model		Adapter Type		Capacity		Additional*	

*Leave column blank if unloaded.

Example Part Number	
Description	Part Number
Indoor SC UPC SX 96 F0 Splicing Distribution Box – Metal – Model 02	IDB04MSCUSX96/P