


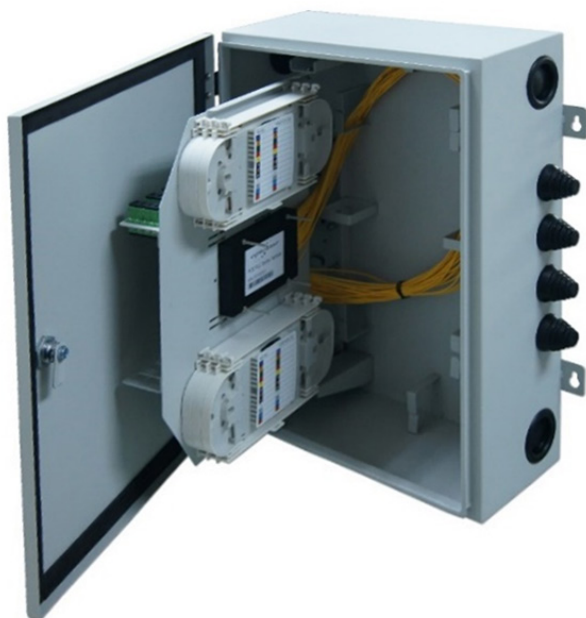

Product Description

BCP® fibre optic distribution and termination boxes are used for the easy-access and distribution of fibre optic connections between networks.

Features & Benefits

- IP55 & IK10 Rated (Harsh environment & temperatures)
- 144 FO
- UV Resistant
- RoHS materials
- For use outdoors

Applications

- Telecommunication networks
- LAN, MAN and WAN applications
- CATV - Cable television
- Fibre-to-the-Home (FTTH)



Technical Specifications

Material	Cold-rolled steel (powder coated)
Dimensions	480x360x120.8mm
Max Splice Tray Qty	6pcs
Max Capacity	144 fibres
Splice Tray Max Capacity	24 fibres



Ordering Information

Use combinations of **bold** letters and numbers to create part numbers for ordering.

Product (Box)		Material		Polish Type*		No of Fibres	
B/ITB	Indoor Terminal	P	Plastic	A	APC	01	1 Pieces
B/IDB	Indoor Distribution	M	Metal	U	UPC	02	2 Pieces
B/OTB	Outdoor Terminal					04	4 Pieces
B/ODB	Outdoor Distribution					06	6 Pieces
B/ISB	Indoor Splitter Box					08	8 Pieces
B/OSB	Outdoor Splitter Box					09	9 Pieces
B/DRB	DIN Rail Box						
⬆		⬆		⬆		⬆	
B/OSB	02	M	SC	A	SX	144	/P
	⬇		⬇		⬇		⬇
Model 1	01	SC	SC	Duplex	DX	Pigtails	/P
Model 2	02	E2000	E2	Quad	QD		
Model 3	03	MTP	MTP	Simplex	SX		
Model 4	04	FC	FC				
Model 5	05	ST	ST				
Model 6	06						
Model 7	07						
Model 8	08						
Model 9	09						
Model		Adapter Type		Capacity		Additional	

*Leave column blank if unloaded.

Example Part Number	
Description	Part Number
BCP Outdoor SC APC Simplex 144 FO Splitter Distribution Box with Pigtails – Metal – Model 02	B/OSB02MSCASX144/P