



Product Description


BCP® fibre optic distribution and termination boxes are used for the easy-access and distribution of fibre optic connections between networks.

Features & Benefits

- 48 FO
- Max 2 splice tray (24 FO each)
- IP67 & IK10 Rated (harsh environment & temperatures)
- UV resistant
- RoHS materials
- For use outdoors

Applications

- Telecommunication networks
- LAN, MAN and WAN applications
- CATV - Cable television
- Fibre-to-the-Home (FTTH)

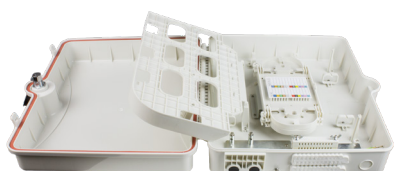

Technical Specifications

Dimensions	380×355.8×140.5mm
Material	ABS plastic
Adapter port	48pcs SC simplex
Max. Capacity	48 Fibres
Max. Quantity of Splice Tray	2pcs
Max. Capacity of Splice Tray	24 Fibres
Colour	White
Application	Outdoor wall mounted; Pole mounted



Ordering Information

Use combinations of **bold** letters and numbers to create part numbers for ordering.

Product (Box)		Material		Polish Type*		No of Fibres	
B/ITB	Indoor Terminal	P	Plastic	A	APC	01	1 Pieces
B/IDB	Indoor Distribution	M	Metal	U	UPC	02	2 Pieces
B/OTB	Outdoor Terminal					04	4 Pieces
B/ODB	Outdoor Distribution					06	6 Pieces
B/ISB	Indoor Splitter Box					08	8 Pieces
B/OSB	Outdoor Splitter Box					09	9 Pieces
B/DRB	DIN Rail Box						
⬆		⬆		⬆		⬆	
B/OSB	12	P	SC	U	SX	48	
	⬇		⬇		⬇		⬇
Model 1	01	SC	SC	Duplex	DX	Pigtails	/P
Model 2	02	E2000	E2	Quad	QD		
Model 3	03	MTP	MTP	Simplex	SX		
Model 4	04	FC	FC				
Model 5	05	ST	ST				
Model 6	06						
Model 7	07						
Model 8	08						
Model 9	09						
Model		Adapter Type		Capacity		Additional	

*Leave column blank if unloaded.

Example Part Number	
Description	Part Number
BCP Outdoor SC UPC Simplex 48 FO Splitter Distribution Box – Plastic – Model 12	B/OSB12PSCUSX48