



Product Description

BCP® designs and manufactures unique and robust patch panels. Our patch panels use various technologies for easy access and organisation: these include pivots, sliding on rail and easy sliding. Many of our panels are modular, to further aid the user.

Features & Benefits


- Easily slides in and out
- Recessed adaptors for improved fibre management
- No exposed screws
- Built-in strength member tie positions
- High quality finish
- Modular design for easy organisation – modular front plates



Applications

- Data and server racks
- FTTx
- Telecommunications

Technical Specifications

Height	1U
Dimensions	×221.5×42mm
Weight (kg)	2.5
Adapter Port	SC Simplex
Max Capacity	24 fibres
Max Quantity of Splice Tray	2 pcs
Splice Tray Max Capacity	12 fibres
Material	Cold-Rolled Steel (Powder Coated)
Rack Width	19"



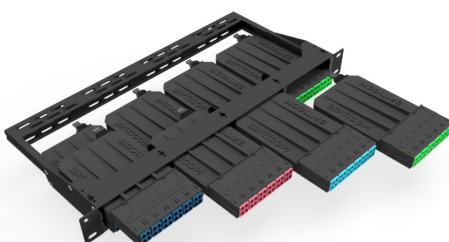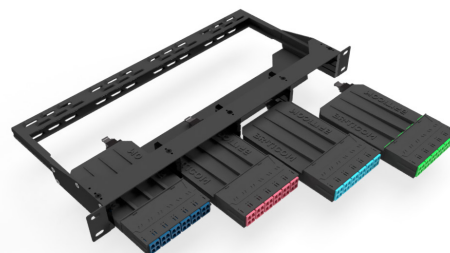

Ordering Information

Use combinations of **bold** letters and numbers to create part numbers for ordering.

Type		Model Number		Polish Type*		Fibre Type		Extra Options	
LG	LGX Flat	1	1	A	Angled	M	Multimode	F	Fibre Management
LM	LGX Mega Density			U	Flat	S	Single-mode	P	Pigtails
						E	Empty	A	Adapters only
						A1	G657A1		
						A2	G657A2		
						B3	G657B3		
						M1	OM1		
						M2	OM2		
						M3	OM3		
						M4	OM4		
						M5	OM5		
						S2	OS2		
↑		↑		↑		↑		↑	
LM	1U	1	LC	U	DX	M4	144	P	
↓		↓		↓		↓			
1 Unit	1U	LC	LC	Simplex	SX	12	12		
3 Unit	3U	SC	SC	Duplex	DX	16	16		
						24	24		
						32	32		
						48	48		
						72	72		
						96	96		
						108	108		
						144	144		
						180	180		
						216	216		
						240	240		
						288	288		
Unit		Adapter Type		Mode		Fibres/Ports			

*Leave column blank if fibre management only.

Example Part Number	
Description	Part Number
1U LGX Mega Density 192 FO Patch Panel Model 1	LM1U1LCUDXM4144P